

**&tradition<sup>®</sup>**

De Projectinrichter

[www.deprojectinrichter.com](http://www.deprojectinrichter.com)  
088 - 650 12 34



---


# ICE CHANDELIER SR4-5-6

by Sofie Refer


---

## USER INSTRUCTIONS


Congratulations on choosing this original Ice Chandelier SR4-6 designed by Sofie Refer. We hope you will enjoy using this product and follow these instructions to ensure correct installation.

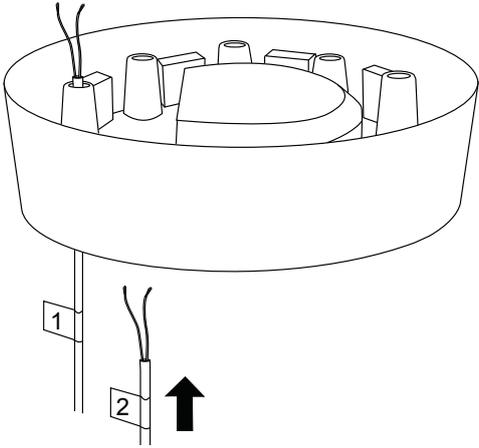**1**


Lead the wires in through the holes at the canopy. Each wire is marked with a number from 1 to 9. Arrange the wires by numerical order. If desired, adjust the length of the wires by shortening the wires. **NB.** Cut off same length of each wire for keeping same formation!

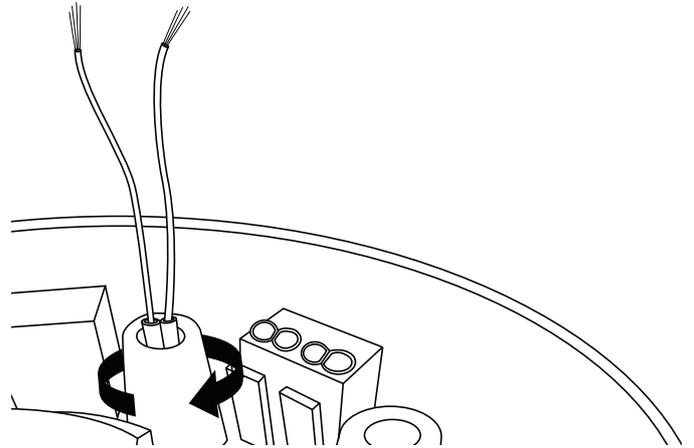**2**

Tighten the wire by turning the white screw clockwise.

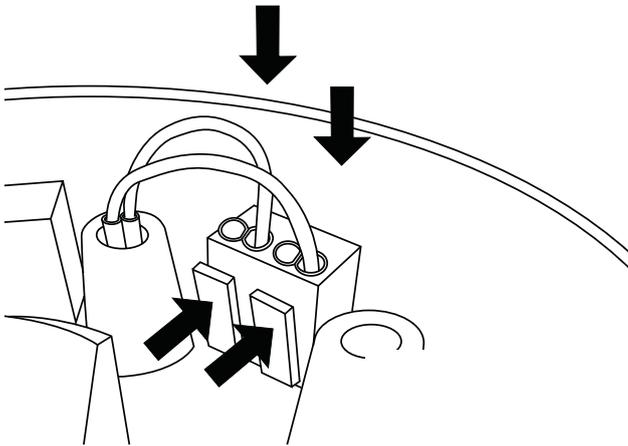
**3**

Lead the ends of the wires in through the plugs. Place one wire-end in one of the two holes to the right side, place the other wire-end in one of the two holes to the left side. (See drawing)

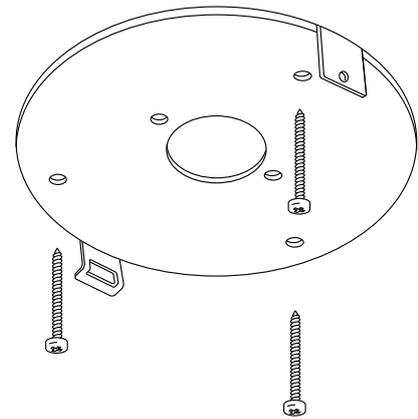**4**


Mount the top plate of the canopy at the ceiling and fix with screws.

5

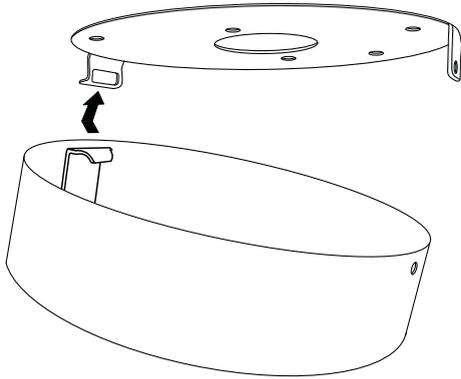


Attach the canopy to the topplate.

6

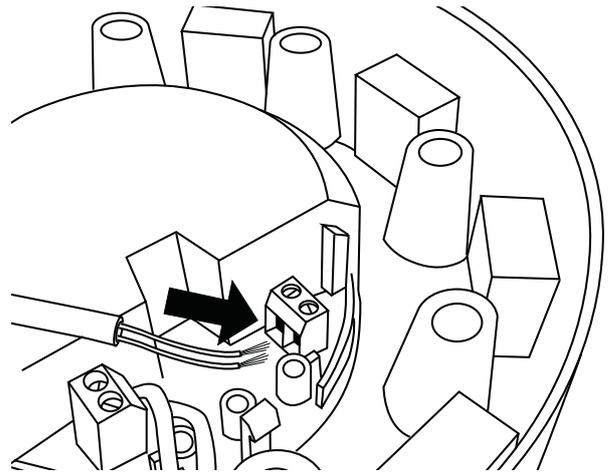


Lead the 230 volt wire into the plugs in centre of the canopy.

7

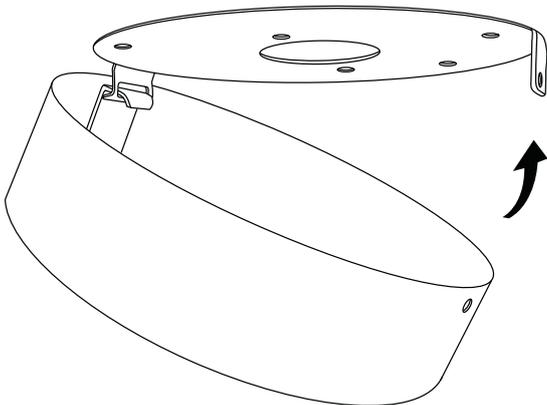


Rotate the canopy to horizontal position.

8

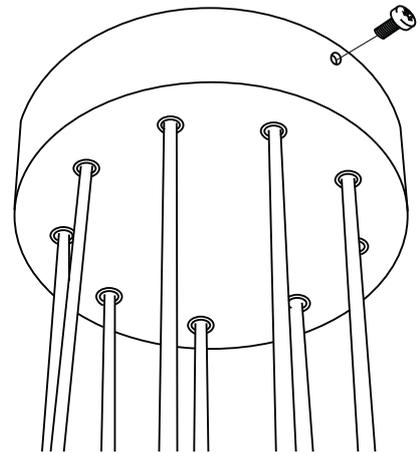


Fix with the screw.

9

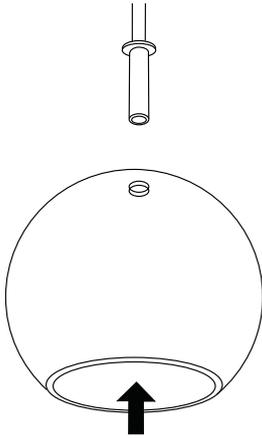


Remove the screw from the metal tubes by hand. Mount the glass-ball.

10

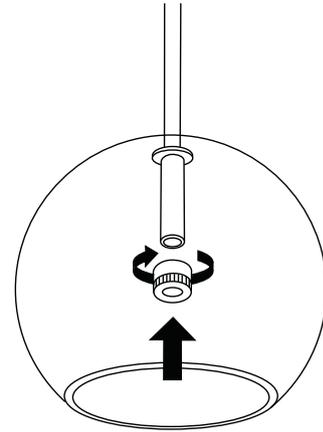


Replace the screw carefully. **NB.** Tighten gently!

11

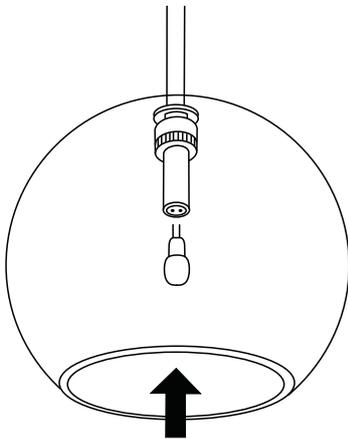

Place the 10 watt halogen bulb in the socket. **NB.** The bulb should not be in directly contact with skin at any time !

12

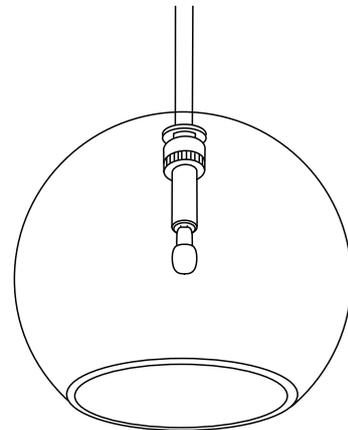

this lamp is mouthblown. Air bubbles do therefore occur and variations in thickness and colour is normal.

De Projectinrichter

[www.deprojectinrichter.com](http://www.deprojectinrichter.com)  
088 - 650 12 34

230VAC / 50HZ – Max 9 x 10W G4

CE  IP20 

Made in Denmark

 **and tradition**<sup>®</sup>