


VL38 FLOOR

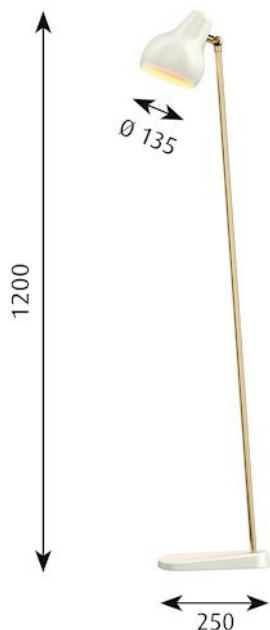

VL38 - DET KGL. DANSKE
MUSIKKONSERVATORIUM

Design:

Vilhelm Lauritzen

Concept:

The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish:

Brushed brass. White, powder coated.

Material:

Base: Die cast aluminium. Shade: Spun aluminium.
Stem: Brushed brass.

Mounting:

Cable type: Plastic cord. Cable length: 4m. Light control: In-line switch on cord. 2 light levels. LED driver: separate, plugs into power outlet.

Weight:

Min: 5.2 kg Max: 5.2 kg

Class:

Ingress protection IP20. Electric shock protection II w/o ground.

VL38 TABLE



Design:

Vilhelm Lauritzen

Concept:

The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish:

Brushed brass. White, powder coated.

Material:

Base: Die cast aluminium Shade: Spun aluminium.
Stem: Brushed brass.

Mounting:

Cable type: Plastic cord. Cable length: 3,3m. Light control: Switch in the lamp stand. 2 light levels.
LED driver: separate, plugs into power outlet.

Weight:

Min: 2.2 kg Max: 2.2 kg

Class:

Ingress protection IP20. Electric shock protection II w/o ground.

Results (1)



CCT/WATT/ LUMEN	LIGHT SOURCE	VOLTAGE/FREQUENCY	FINISH	EFFICACY	ORDER-NO.	
2700K 9.6 416	10WLED 2700K	120V/60HZ	WHT	43	5744165206	>

SPAREPART

PRODUCT NAME:

ADAPTOR 12V WHT

ORDERING NUMBER:

5744164870

Results (1)



CCT/WATT/ LUMEN	LIGHT SOURCE	VOLTAGE/FREQUENCY	FINISH	EFFICACY	ORDER-NO.	>
2700K 9.6 416	10WLED 2700K	120V/60HZ	WHT	43	5744165196	>

SPAREPART

PRODUCT NAME:

ADAPTOR 12V WHT

ORDERING NUMBER:

5744164870

VL38 WALL

**Design:**

Vilhelm Lauritzen

Concept:

The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish:

Brushed brass. White, powder coated.

Material:

Wall box: Punched aluminium. Shade: Spun aluminium. Arm: Brushed brass.

Mounting:

Cable type: Plastic cord. Cable length: 3,3m. Light control: Switch on wall box. 2 light levels. LED driver: separate, plugs into power outlet.

Weight:

Min: 0.9 kg Max: 0.9 kg

Class:

Ingress protection IP20. Electric shock protection II w/o ground.

Results (1)



CCT/WATT/ LUMEN	LIGHT SOURCE	VOLTAGE/FREQUENCY	FINISH	EFFICACY	ORDER-NO.	
2700K 9.6 416	10WLED 2700K	120V/60HZ	WHT	43	5743163306	>

SPAREPART

PRODUCT NAME:

ADAPTOR 12V WHT

ORDERING NUMBER:

5744164870