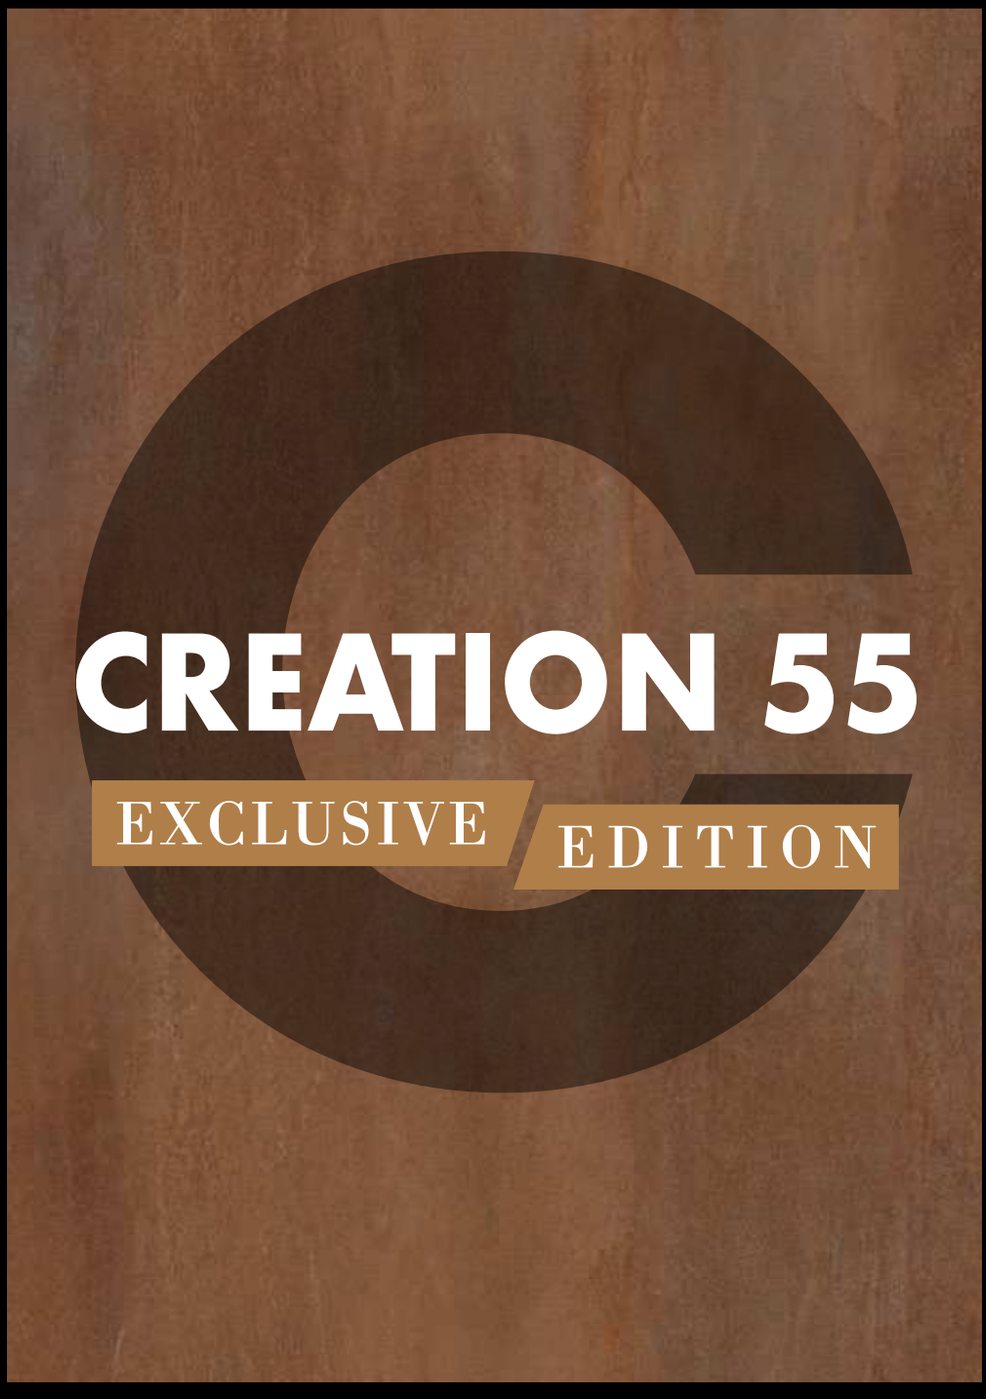

Gerflor®
theflooringgroup

0810 CHEVRON MOKA

INTERIOR DESIGNER
Visualize the designs in a room setting using Gerflor Interior Designer.
interiordesigner.gerflor.com

0095 RUST CORTEN

0815 BOSTONIAN OAK HONEY

CREATION 55

EXCLUSIVE EDITION

RUST CORTEN

Installation	Format/cm	Code
	45.7x91.4	0095

RUST METAL

Installation	Format/cm	Code
	45.7x91.4	0094

NORTH WOOD MACCHIATO

Installation	Format/cm	Code
	18.4x121.9	0816

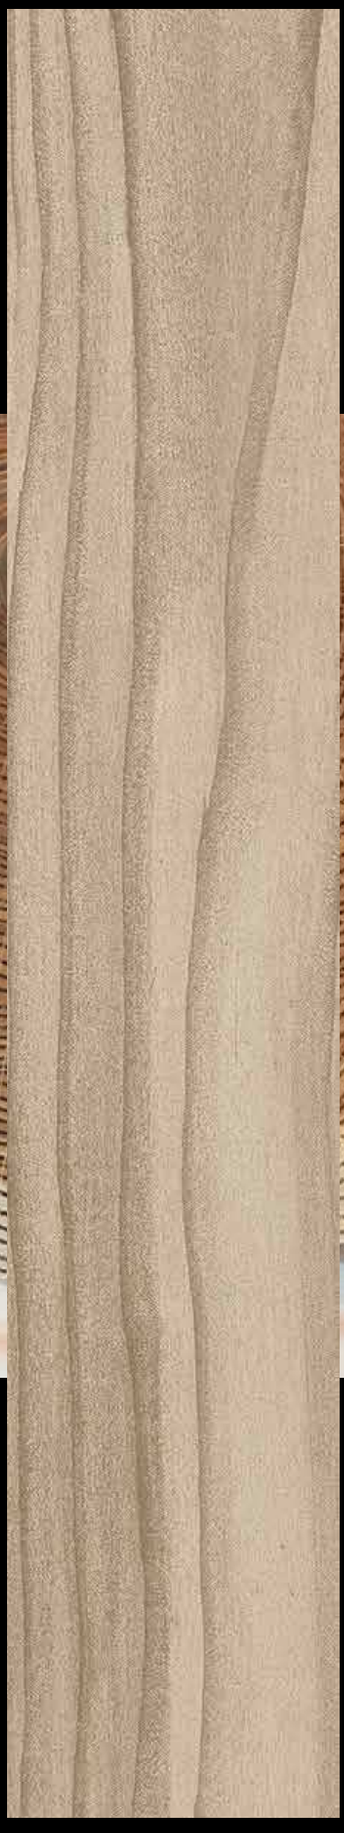

NORTH WOOD MOKACCINO

Installation	Format/cm	Code
	18.4x121.9	0817

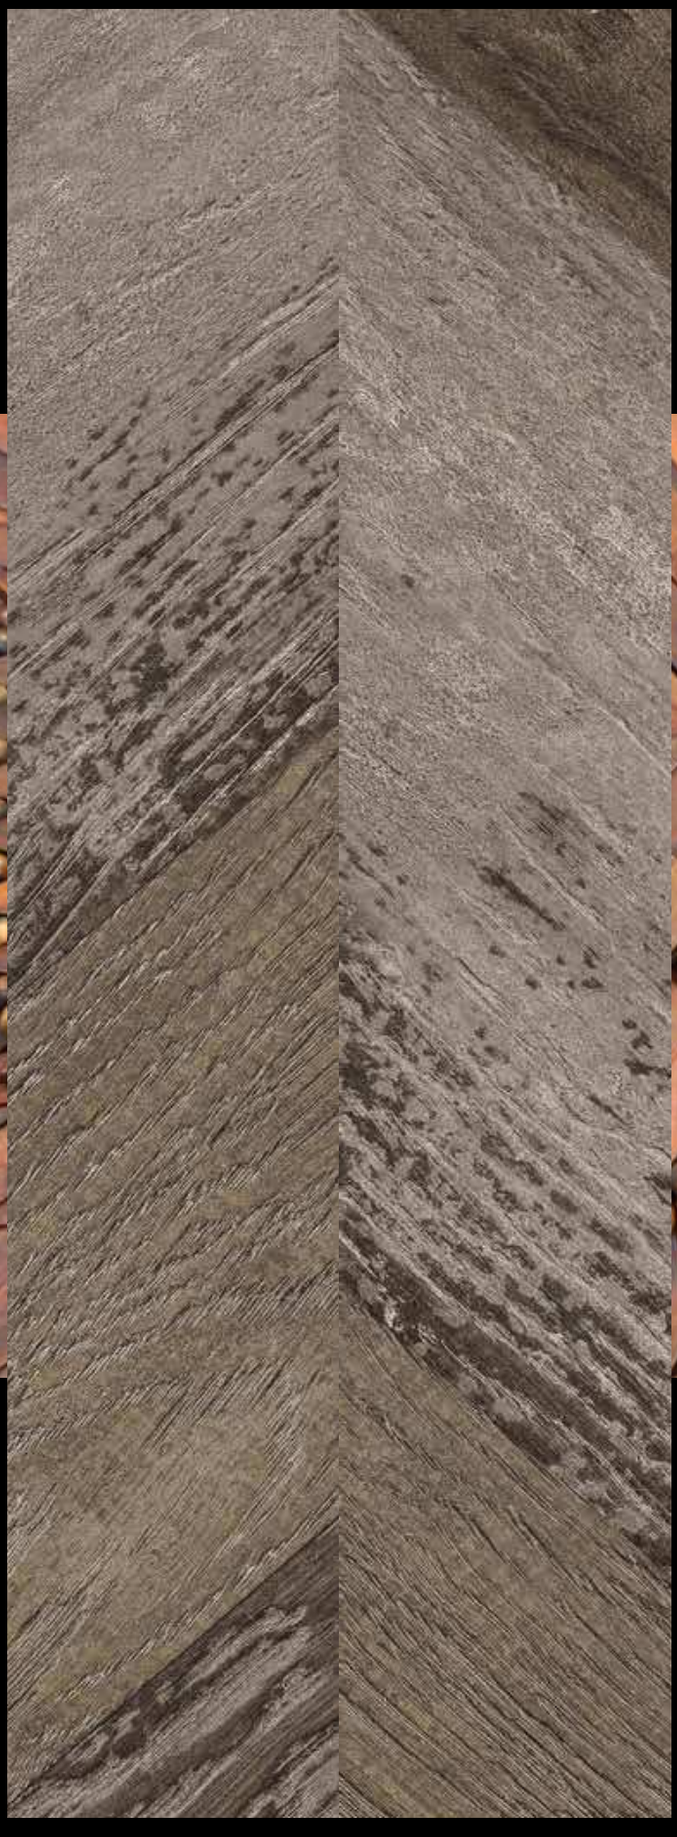

CHEVRON MOKA

Installation	Format/cm	Code
	18.4x121.9	0810

CHEVRON HURRICANE

Installation	Format/cm	Code
	18.4x121.9	0809

CHEVRON BUCKWHEAT

Installation	Format/cm	Code
	18.4x121.9	0811

1.50 m

NEW XL PLANK

SWISS OAK CASHMERE

Installation	Format/cm	Code
	23x150	0795

SWISS OAK GOLDEN

Installation	Format/cm	Code
	23x150	0796

BOSTONIAN OAK GOLD

Installation	Format/cm	Code
	18.4x121.9	0814

BOSTONIAN OAK HONEY

Installation	Format/cm	Code
	18.4x121.9	0815

ULTRA REALISTIC EMBOSSING

ROYAL OAK BLOND

Installation	Format/cm	Code
	18.4x121.9	0812

ROYAL OAK COFFEE

Installation	Format/cm	Code
	18.4x121.9	0740

CREATION 55

	CREATION 55

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE / BESKRIVNING / BESKRIVELSE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale / Total tjocklek / Total tykkelse	EN ISO 24346 (EN 428)	mm	2.50
	ASTM F386-02	inch	0.1
Thickness of the wearlayer / Dicke der Nutzschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura / Slitskikt tjocklek / Tykkelse slitesjikt	EN ISO 24340 (EN 429)	mm	0.55
	ASTM F410-02	inch	0.02
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Vikt / Vekt	EN ISO 23997 (EN 430)	g/m²	4410
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione / Storlek / Størrelse	ISO 24342 (EN 427)	mm	457x914 / 610x610 / 305x610 / 184x1371 / 184x1219 / 152x914 / 230x1500 Mix: 152x914-228x914-76x914
	ASTM F 536	inch	18"x36" / 24"x24" / 12"x24"/ 7,25"x54" / 7,25"x48" / 6"x36" Mix: 6"x36"-9"x36"-3"x36"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI / KLASSIFICERING / KLASSIFISERING

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/Spécification produit / Normas / Normas / Norma prodotto / Norm/Produktspecifikation / Norm	-	-	EN ISO 10582 (EN 649)
	ASTM F 1700-04	-	Class III Type B
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Classificación europea / Classificação Europeia / Europea / Europaklass / Europaklasse	EN ISO 10874 (EN 685)	Class	33 - 42
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco / Brandklassificering / Brannklassifisering	EN 13 501-1	Class	B_{fl}-s1
	ASTM E648-08	Class	1
	CAN/ULC S102.2	-	-
Static Electrical Propensity / Begehaufladung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica / Elektrisk uppladdning / Elektrostatisk oppladning	EN 1815	kV	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida[1] / Friktion / Friksjon, våt	DIN 51130 /BGR 181	Class	R9/R10/R11[2]

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE / TESTVÄRDEN / TESTVERDIER

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione / Slitagemotstånd /Slitestyrke	EN 660.2	mm³	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvasheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione / Slitklass / Slitasjegruppe	EN 652	group	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante / Bindemedelsinnehåll / Bindemiddel innhold	ISO 10582	group	I
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar / Trumljud / Romlyd	NF S 31074	dB	76
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico / Stegljudsdämpning / Trinnlydsdemping	EN ISO 717-2	dB	4
Dimensional Stability / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale / Dimensionsstabilitet / Dimensjonsstabilitet	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta / Intrycksbeständighet / Inntrykksfasthet	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passagio di sed / Tålighet mot rullande stolshjul / Rullende stolhjul (Type W)	ISO 4918 (EN 425)	-	OK
Thermal Conductivity / Wämeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemostand	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce / Färgbeständighet / Fargebestandighet	EN 20 105 - B02	degree	≥ 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superfície / Trattamento di superficie / Ytbehandling / Overflatebehandling	-	-	PUR+
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos /Resistência aos produtos químicos / Resistenza ai prodotti chimici / Kemikaliebeständighet / Kjemikaliebstandighet	EN ISO 26987 (EN 423)	-	OK / Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Saüren und Laugen bei kurzzeitiger Einwirkung

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR / INNOMHUSLUFT / EMISJONER

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m³	< 100

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA / CE-MÄRKNING / CE MARKING

CE	EN 14041	-	DS B_{fl}-s1

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile
(2) Glissance humide / Slip resistance wet / Rutschhemmung : details sur site gerflor.com / details on website gerffor.com / Einzelheitem auf der web-site gerflor.com

CREATION 55: **LESS SPEAKING, MORE ACTIONS**

COMPOSITION
100% REACH

INDOOR AIR QUALITY
10 times better than norms requirements
(TVOC < 100ug/m³ after 28 days)
No formaldehyde emission

RECYCLED CONTENT
45%

RECYCLABILITY
100%

WELNESS
Walking noise reduction :
-10dB vs Laminate

IMPORTANT: The information contained in this document is valid from 01/07/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

IMPORTANT : *Les informations contenues dans ce document sont valables à compter du : 01/07/2017 et susceptibles d'être modifiées à tout moment et sans préavis. L'évolution de la technique étant permanente, il appartient à notre clientèle avant toute mise en œuvre, de vérifier auprès de nos services que le présent document est bien celui en vigueur.*

FRANCE: Gerflor Service Express
N°Azur 0 810 569 569 PRIX APPEL LOCAL
N°Azur FAX 0 810 569 570 PRIX APPEL LOCAL
e-mail: contactfrance@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

Gerflor® theflooringgroup

RC Lyon B 726 580 152 - jpe - Printed in CEE 209 406 - Non-contractual imagery - 07/2017 - Z001 3189 - Indicative documentation cost: 7.80 €