


Product information – LimbusConcept



Equivalent absorption surface per m² of screen surface (m²S/m²)
The 8mm MDF core reduces the sound transmission effectively

Sizes	Widths: 1000, 1200, 1400, 1600, 1800mm. Depths: 600, 800mm Height: 1260mm above floor. Table top: 720mm above floor Height above table top 530mm
Table top fixed	10mm, white compact laminate with black core. Measure fitted to size. Standard depth: 550mm and 750mm The table top is provided with framework of lists for attachment to the screens. Cable Feed Through Grommet in aluminium. Placed in the middle. A cable through Ø80mm, gray, is placed in screens between workplaces.
Sit/stand legs	Lifting columns DL6 Desklift from Linak. Table height: 650-1300mm (Programmed to max height 1100mm) 1200N / leg Standby power 0,1W
Configurations	The Concept furniture can be configured in C-, or H-Modules and extension modules.
Construction	15mm sound absorbing polyether is glued on both sides of an 8mm sound reducing MDF board with a sharp edged frame. The screen is coated with fabric and stands on two legs. The nails are covered with a fabric piping in different colour options Standard options are white and black. No visible stitches. Toolbars can be integrated in the screen.
Board	8mm sound reducing MDF board with a 40mm MDF-frame. (Nordic label)
Acoustic filling	2 x 15mm sound absorbing HR60-Polyether. (Ökotex)
Glue	Waterbased glue.

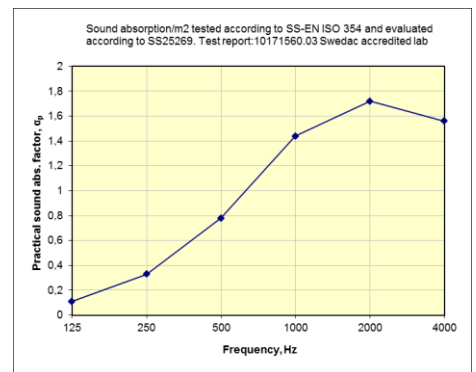

GLIMAKRA
OF SWEDEN

Product information – LimbusConcept

Cover	Europost and Flex from Gabriel Lucia and Blazer 1 & 2 from Camira Basic from Bogesund Customers choice quoted
Environment	100% recyclable.
Integrated toolbar	Conceptum from Kondator AB
Specification text	(Ex.) Limbus Concept h=1250mm. 1600x1640x40mm, sharp edges. Sound absorbing filling with fabric, inside: Blazer CUZ 1E Sound absorbing filling with fabric, outside: Blazer CUZ 30 Fabric piping: Black 190 2pc fixed table tops in 10mm HPL, white with black core Screens are connected with concealed fittings.



De Projectinrichter

www.deprojectinrichter.com
088 - 650 12 34